


PRODUCT DESCRIPTION:

Designed to fit any ceiling surface. Suspended and hanging for other types of ceilings such as art galleries, homes, schools, offices, hotels, restaurants, retail stores and other commercial or industrial applications.

FEATURES:

- Low maintenance
- Environmentally friendly
- No mercury
- Recyclable

DIMENSIONS:

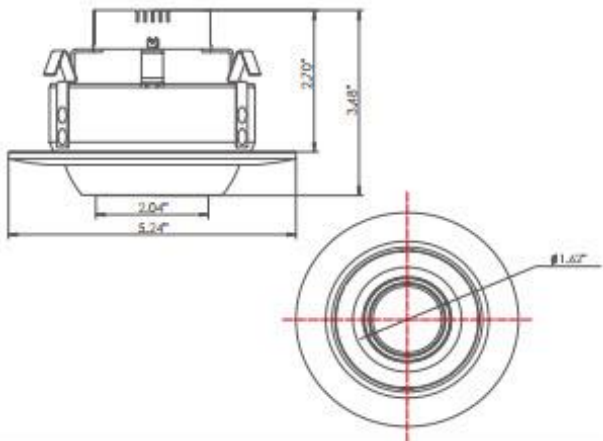

4" Gimbal Downlight 10W Spec

LOD-DL4GB-AD10W-30K

LOD-DL4GB-AD10W-50K



SPECIFICATIONS:

SPECIFICATION	Details	
Model	LOD-DL4GB-AD10W-30K	LOD-DL4GB-AD10W-50K
Input Wattage (W)	10W	
Lumens Delivered (LM)	700LM	700LM
Efficacy (LM/W)	70LM/W	70LM/W
CRI	92	92
Lifespan	35,000 hours	
Color Temperature	3,000K	5,000K
Wattage Equivalent	65W	
Dimmable	Yes	
IP Rating	Damp Location	
Beam Angle	95	
Input Voltage	120V	
Power Factor	0.96	0.96
Housing	Aluminum	
Lens	Frosted	
Mounting	E26	
Size	5.24" x 3.48" x 1.62"	
Certification	ES, UL	
Operating Temperature	-20°C to 50°C (-4°F to 122°F)	
Environment	Indoor	
Warranty	3 years limited	

